PRODUCT DETAIL

COLD ROLLED FLAT STEEL

PRODUCT AND APPLICATIONS

Thanks to our state-of-the-art, fully automated production lines, we are able to manufacture a wide range of extruded profiles, both standard and custom-designed to the customer's specifications. With a production capacity of **more than 80.000 tons/year** SIAT supplies all the biggest European industries of **windows mechanisms**, **furniture**, **household appliances**, **automotive**, **displaying** and **shop fitting**.

SIAT cold rolled flats are produced according to **EN 10139 standard**.

Our cold rolled flat steels produced at the Gemona del Friuli (UD) plant are now certified with the **EPD - Environmental Product Declaration**. The EPD comprehensively documents consumption and impact, providing our customers with reliable and comparable data for their design and purchasing decisions.

PACKAGING	
Type	Spooled coils
Weight	1,000 ÷ 2,500 Kg
Ø internal	400 - 500 mm
Ø outside	800 ÷ 1,250 mm
Height	300 - 380 - 500 mm

SECTIONS

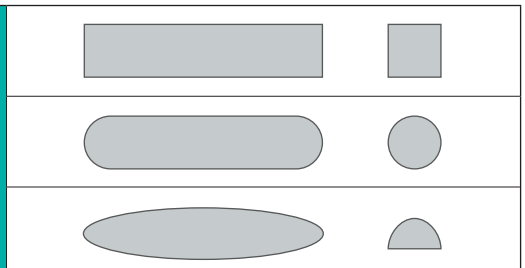

Sharp or round edged.
Profiled sections are available on demand.

RANGE

Width (mm)

Thickness (mm)	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
1,5				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
1,6				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
1,7				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
1,8				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
1,9				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
2			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
5	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■							
8				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■								
9					■	■	■	■	■	■	■	■	■	■	■	■	■									
10						■	■	■	■	■	■	■	■	■	■	■										
11							■	■	■	■	■	■	■	■	■											
12								■	■	■	■	■	■	■												

The information contained in this document may not be up to date. For further information, please contact your sales representative.